

# 宇华国际科技有限公司 YuHua INT,L Technology Co., LIMITED

# SPECIFICATION FOR LCD MODULE

Customer : Product Model: YH		070NA - 01P				
Sample code	:					
Designed by	Cł	necked by	Approved by			
Final App	roval by Cus	tomer				
LCM M	<b>Iachinery OK</b>	LCM OK				
Checked By		NG , Problem survey:				
LCM D	isplay OK					
Checked By		Approved By				

\*The specification of "TBD" should refer to the measured value of sample. If there is difference between the design specification and measured value, we naturally shall negotiate and agree to solution with customer.

## Record of Revision

Version	Revise Date	Page	Content
Pre-Spec.01	2018/01/11		Initial Release.
_			

## Contents

1.	General Specifications	1
2.	Pin Assignment	2
3.	Operation Specifications	5
	3.1. Absolute Maximum Ratings	5
	3.1.1. Typical Operation Conditions	6
	3.1.2. Current Consumption	7
	3.1.3. Backlight Driving Conditions	7
	3.2. Power Sequence	8
	3.3. Timing Characteristics	9
	3.3.1. AC Electrical Characteristics	9
	3.3.2. Input Clock and Data Timing Diagram	9
	3.3.3. DC Electrical Characteristics	10
	3.3.4. Timing	11
	3.3.5. Data Input Format	12
4.	Optical Specifications	13
5.	Reliability Test Items	17
6.	General Precautions	18
	6.1. Safety	18
	6.2. Handling	18
	6.3. Static Electricity	18
	6.4. Storage	18
	6.5. Cleaning	18
7.	Mechanical Drawing	19
8.	Package Drawing	20
	8.1. Packaging Material Table	
	8.2. Packaging Quantity	
	8.3. Packaging Drawing	21

# 1. General Specifications

No.	Item	Specification	Remark
1	LCD size	7.0 inch(Diagonal)	
2	Driver element	a-Si TFT active matrix	
3	Resolution	1024 × 3(RGB) × 600	
4	Display mode	Normally White, Transmissive	
5	Dot pitch	0.05(W) × 0.15(H) mm	
6	Active area	153.6(W) × 90.0(H) mm	
7	Module size	165.75 (W) ×105.39(H) ×4.8(D) mm	Note 1
8	Surface treatment	Glare	
9	Color arrangement	RGB-stripe	
10	Interface	Digital	
11	View direction(Gray Inversion)	6 O'Clock	
12	Backlight power consumption	3.564W (Typ.)	
13	Panel power consumption	0.35W (Typ.)	
14	Weight	TBD(Typ.)	

Note 1: Refer to Mechanical Drawing.

## 2. Pin Assignment

FPC Connector is used for the module electronics interface. The recommended model is

FH12A-40S-0.5SH manufactured by Hirose.

Pin No.	Symbol	I/O	Function	Remark
1	VCOM	Р	Common Voltage	
2	VDD	Р	Power Voltage for digital circuit	
3	VDD	Р	Power Voltage for digital circuit	
4	NC		No connection	
5	Reset	I	Global reset pin	
6	STBYB	I	Standby mode, Normally pulled high STBYB = "1", normal operation STBYB = "0", timing controller, source driver will turn off, all output are High-Z	
7	GND	Р	Ground	
8	RXIN0-	I	- LVDS differential data input	
9	RXIN0+	I	+ LVDS differential data input	
10	GND	Р	Ground	
11	RXIN1-	l	- LVDS differential data input	
12	RXIN1+	l	+ LVDS differential data input	
13	GND	Р	Ground	
14	RXIN2-	I	- LVDS differential data input	
15	RXIN2+	I	+ LVDS differential data input	
16	GND	Р	Ground	
17	RXCLKIN-	l	- LVDS differential clock input	
18	RXCLKIN+	I	+ LVDS differential clock input	
19	GND	Р	Ground	
20	RXIN3-	I	- LVDS differential data input	
21	RXIN3+	I	+ LVDS differential data input	
22	GND	Р	Ground	
23	NC		No connection	
24	NC		No connection	
25	GND	Р	Ground	
26	NC		No connection	

27	DIMO	0	Backlight CABC controller signal output	
28	SELB	I	6bit/8bit mode select	Note1
29	AVDD	Р	Power for Analog Circuit	
30	GND	Р	Ground	
31	LED-	Р	LED Cathode	
32	LED-	Р	LED Cathode	
33	L/R	——I	Horizontal inversion	Note3
34	U/D		Vertical inversion	Note3
35	VGL	Р	Gate OFF Voltage	
36	CABCEN1	I	CABC H/W enable	Note2
37	CABCEN0	I	CABC H/W enable	Note2
38	VGH	Р	Gate ON Voltage	
39	LED+	Р	LED Anode	
40	LED+	Р	LED Anode	

I: input, O: output, P: Power

Note1: If LVDS input data is 6 bits ,SELB must be set to High;

If LVDS input data is 8 bits ,SELB must be set to Low.

Note2: When CABC EN="00", CABC OFF.

When CABC\_EN="01", user interface image.


When CABC\_EN="10", still picture.
When CABC\_EN="11", moving image.

When CABC off, don't connect DIMO, else connect it to backlight.

Note3: When L/R="0", set right to left scan direction.

When L/R="1", set left to right scan direction. When U/D="0", set top to bottom scan direction. When U/D="1", set bottom to top scan direction.

Note: Definition of scanning direction. Refer to the figure as below:

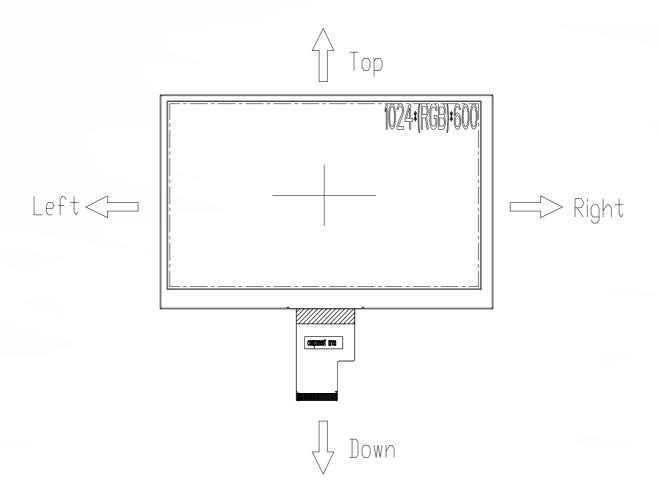

## 3. Operation Specifications

### 3.1. Absolute Maximum Ratings

(Note 1)

		Val	ues		
Item	Symbol	Min.	Max.	Unit	Remark
			Maxi		
	$DV_DD$	-0.3	5.0	V	
	$AV_DD$	6.5	13.5	V	
Power voltage	V <sub>GH</sub>	-0.3	42.0	V	
	$V_{GL}$	-20.0	0.3	V	
	$V_{GH}$ - $V_{GL}$	-	40.0	V	
Operation Temperature	T <sub>OP</sub>	-30	80	°C	
Storage Temperature	T <sub>ST</sub>	-30	80	$^{\circ}\!\mathbb{C}$	
LED Reverse Voltage	VR	-	5	V	Each LED
LED Forward Current	lf	-	60	mA	Each LED


Note 1: The absolute maximum rating values of this product are not allowed to be exceeded at any times. Should a module be used with any of the absolute maximum ratings exceeded, the characteristics of the module may not be recovered, or in an extreme case, the module may be permanently destroyed.

#### 3.1.1. Typical Operation Conditions

( Note 1)

ltem	Symbol		Values	Unit	Remark	
item	Symbol	Min.	Тур.	Max.	Ollit	Remark
	DV <sub>DD</sub>	3.0	3.3	3.6	V	Note 2
Power voltage	$AV_{DD}$	10.8	11	11.2	V	
	$V_{GH}$	19.7	20	20.3	V	-
	$V_{GL}$	-6.5	-6.8	-7.1	V	
Input signal voltage	V <sub>COM</sub>	2.7	(3.7)	4.7	V	Note 4
Input logic high voltage	V <sub>IH</sub>	0.7 DV <sub>DD</sub>	-	DV <sub>DD</sub>	V	Note 3
Input logic low voltage	V <sub>IL</sub>	0	-	0.3 DV <sub>DD</sub>	V	note 5

- Note 1: Be sure to apply  $DV_{DD}$  and  $V_{GL}$  to the LCD first, and then apply  $V_{GH}$ .
- Note 2: DV<sub>DD</sub> setting should match the signals output voltage (refer to Note 3) of customer's system board.
- Note 3: LVDS, Reset.
- Note 4: Typ.  $V_{COM}$  is only a reference value, it must be optimized according to each LCM. Be sure to use VR;

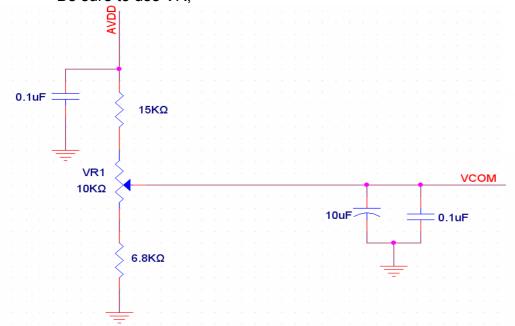

#### 3.1.2. Current Consumption

	Symbol		Values		Unit	Remark	
Item	Syllibol	Min.	Тур.	Max.	Offic		
	$I_{GH}$	-	0.25	1.0	mA	V <sub>GH</sub> =20V	
Current for Driver	I <sub>GL</sub>	-	0.25	1.0	mA	V <sub>GL</sub> = -6.8V	
Current for Driver	$IDV_DD$	-	38	60	mA	DV <sub>DD</sub> =3.3V	
	IAV <sub>DD</sub>	-	20	30	mA	AV <sub>DD</sub> =11V	

#### 3.1.3. Backlight Driving Conditions


ltem	Symbol		Values	Unit	Remark	
itein	Syllibol	Min.	Тур.	Max.	Offic	Remark
Voltage for LED backlight	$V_L$		9.6	10.5	V	Note 1
Current for LED backlight	ΙL		360	600	mA	
LED life time	-	-	20,000	-	Hr	Note 2

Note 1: The LED Supply Voltage is defined by the number of LED at Ta=25  $^{\circ}{\rm C}$  and IL =360mA.


Note 2: The "LED life time" is defined as the module brightness decrease to 50% original brightness at Ta=25 $^{\circ}$ C and I<sub>L</sub> =360mA. The LED lifetime could be decreased if operating I<sub>L</sub> is lager than 360mA.

### 3.2. Power Sequence

#### a. Power on:

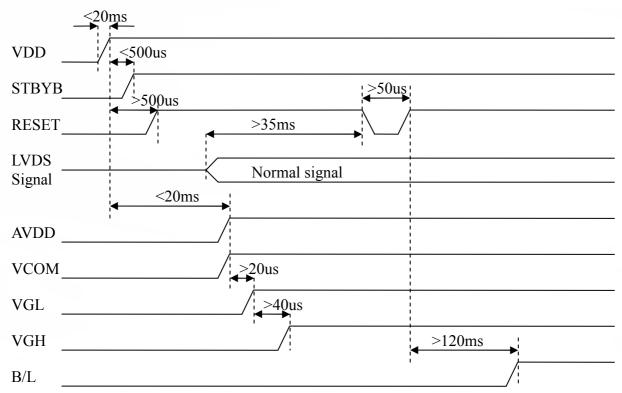

#### b. Power off:

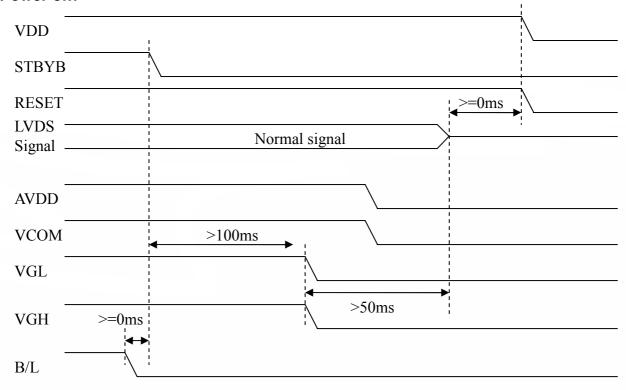



## 3.3. Timing Characteristics

#### 3.3.1. AC Electrical Characteristics

Parameter	Symbol		Values	Unit	Remark	
Parameter	Symbol	Min.	Тур.	Max.	Oilit	Keillaik
Clock frequency	R <sub>xFCLK</sub>	40.8	51.2	67.2	MHz	
Input data skew margin	T <sub>RSKM</sub>	500	-	-	ps	
Clock high time	T <sub>LVCH</sub>	-	4/(7* R <sub>xFCLK</sub> )	-	ns	
Clock low time	T <sub>LVCL</sub>	-	3/(7* R <sub>xFCLK</sub> )	-	ns	


#### 3.3.2. Input Clock and Data Timing Diagram

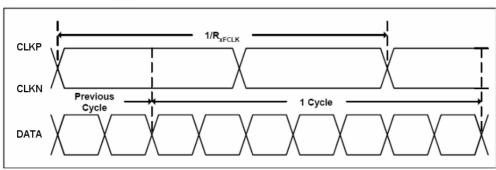

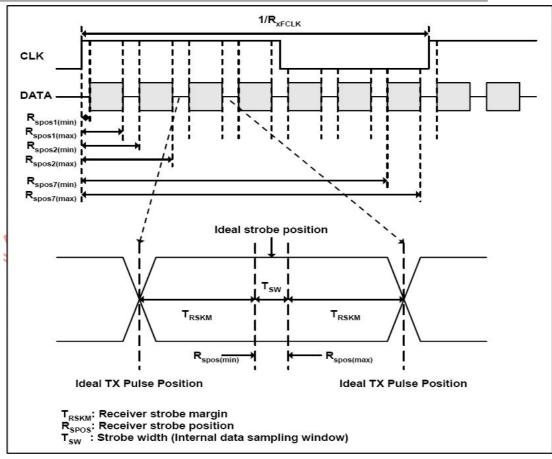

#### 3.3.3. DC Electrical Characteristics

Parameter	Symbol		Values	Unit	Remark	
	- J	Min.	Тур.	Max.		
Differential input high Threshold voltage	R <sub>xVTH</sub>	-	-	+0.1	V	R <sub>XVCM</sub> =1.2V
Differential input low Threshold voltage	R <sub>xVTL</sub>	-0.1	1	-	V	1 (XVCM - 1.2 v
Input voltage range (singled-end)	R <sub>xVIN</sub>	0	1	2.4	<b>V</b>	
Differential input common mode voltage	R <sub>xVCM</sub>	V <sub>ID</sub>  /2	ı	2.4- V <sub>ID</sub>  /2	>	
Differential voltage	V <sub>ID</sub>	0.2	ı	0.6	<b>V</b>	
Differential input leakage current	$RV_{xliz}$	-10	-	+10	uA	

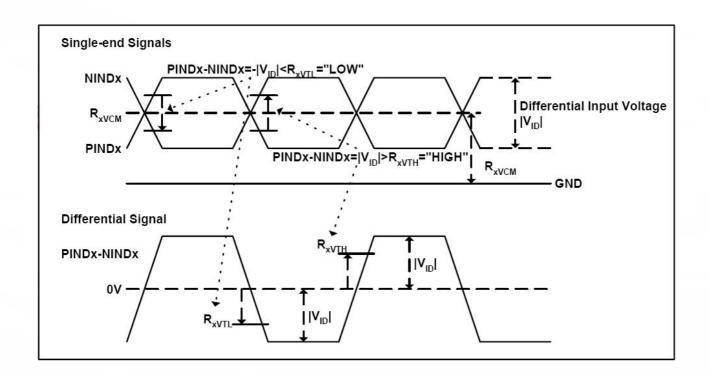


### 3.3.4. Timing


ltem	Symbol	Values			Unit	Remark	
item		Min.	Тур.	Max.	Offic	IVEIIIAIK	
Clock Frequency	fclk	40.8	51.2	67.2	MHz	Frame rate =60Hz	
Horizontal display area	thd		1024		DCLK		
HS period time	th	1114	1344	1400	DCLK		
HS Blanking	thb	90	320	376	DCLK		
Vertical display area	tvd		600		Н		
VS period time	tv	610	635	800	Н		
VS Blanking	thb	10	35	200	Н		

#### 3.3.5. Data Input Format

#### **6bit LVDS input**

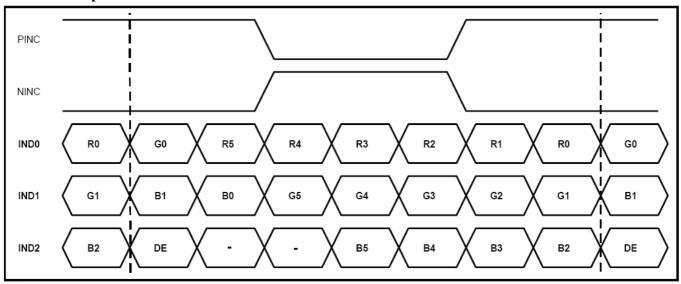

**8bit LVDS input** 

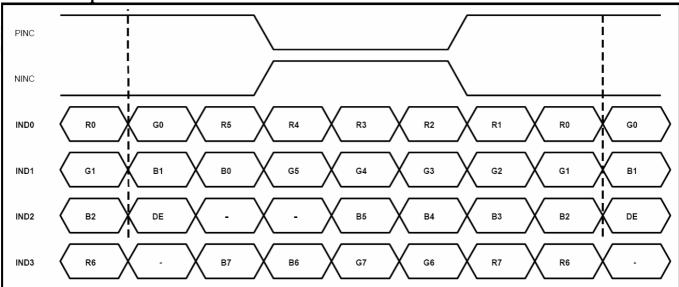

Note: Support DE timing mode only, SYNC mode not supported.

# 4. Optical Specifications

Item	Symbol	Condition	Values			Unit	Remark	
item	Syllibol	Condition	Min.	Тур.	Max.	Oilit	Kelliaik	
Viewing angle (CR≥ 10)	θι	Ф=180°(9 o'clock)	65	75	-		Note 1	
	$\theta_{R}$	Φ=0°(3 o'clock)	65	75	-	dograo		
	θτ	Φ=90°(12 o'clock)	60	70	-	degree		
	$\theta_{B}$	Φ=270°(6 o'clock)	65	75	-			
Response time	T <sub>ON</sub>		-	10	20	msec	Note 3	
	T <sub>OFF</sub>		-	15	30	msec	Note 3	
Contrast ratio	CR		500	700	-	-	Note 4	
Color chromaticity	W <sub>X</sub>	Normal θ=Φ=0°	0.26	0.31	0.36	-	Note 2	
	W <sub>Y</sub>		0.28	0.33	0.38	-	Note 5 Note 6	
Luminance	L		400	450	-	cd/m2	Note 6	
Luminance uniformity	Yu		70	75	-	%	Note 7	

#### Test Conditions:

- 1. DV<sub>DD</sub>=3.3V, I<sub>L</sub>=360mA (Backlight current), the ambient temperature is 25  $^{\circ}\text{C}$  .
- 2. The test systems refer to Note 2.

#### Note 1: Definition of viewing angle range

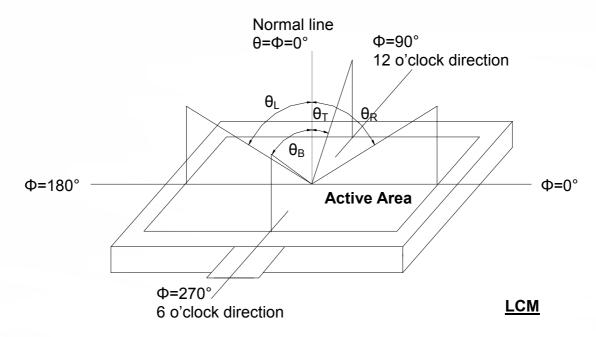


Fig. 4-1 Definition of viewing angle

#### Note 2: Definition of optical measurement system.

The optical characteristics should be measured in dark room. After 30 minutes operation, the optical properties are measured at the center point of the LCD screen. (Response time is measured by Photo detector TOPCON BM-7, other items are measured by BM-5A/Field of view: 1° /Height: 500mm.)

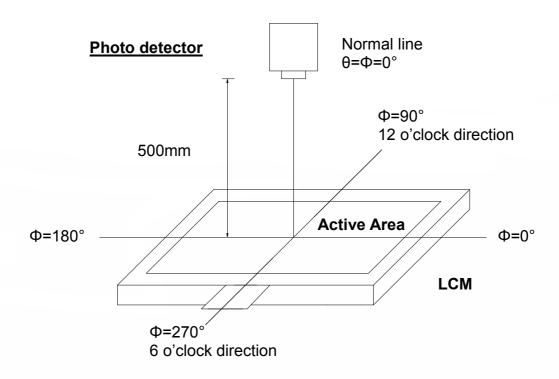


Fig. 4-2 Optical measurement system setup

#### Note 3: Definition of Response time

The response time is defined as the LCD optical switching time interval between "White" state and "Black" state. Rise time  $(T_{ON})$  is the time between photo detector output intensity changed from 90% to 10%. And fall time  $(T_{OFF})$  is the time between photo detector output intensity changed from 10% to 90%.

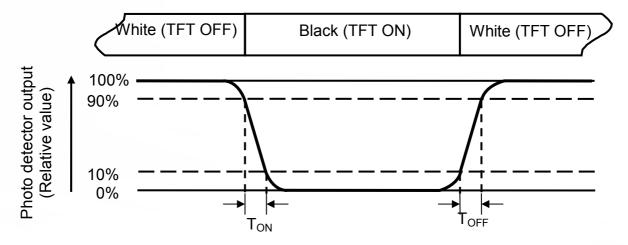


Fig. 4-3 Definition of response time

#### Note 4: Definition of contrast ratio

Contrast ratio (CR) =  $\frac{\text{Luminance measured when LCD on the "White" state}}{\text{Luminance measured when LCD on the "Black" state}}$ 

#### Note 5: Definition of color chromaticity (CIE1931)

Color coordinates measured at center point of LCD.

#### Note 6: Definition of luminance:

Measured at the center area of the panel when LCD panel is driven at "white" state. The LED driving condition is  $I_L$ =360mA.

#### Note 7: Definition of Luminance Uniformity

Active area is divided into 9 measuring areas (Refer to Fig. 4-4 ). Every measuring point is placed at the center of each measuring area.

asuring point is placed at the center of e   
Luminance Uniformity (Yu) = 
$$\frac{B_{min}}{B_{max}}$$

L-----Active area length W----- Active area width

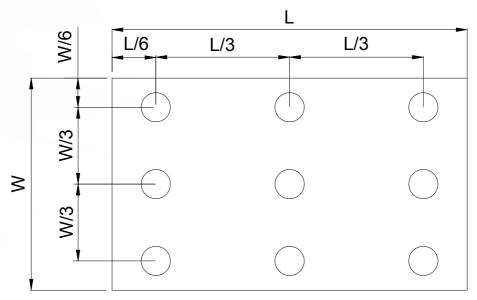


Fig. 4-4 Definition of measuring points

 $\mathbf{B}_{\text{max}}$ : The measured maximum luminance of all measurement position.  $\mathbf{B}_{\text{min}}$ : The measured minimum luminance of all measurement position.

## 5. Reliability Test Items

(Note3)

Item	Test Conditions			Remark	
High Temperature Storage	Ta = 80℃	240hrs	Note 1,	Note 4	
Low Temperature Storage	Ta = -30°C	240hrs	Note 1,	Note 4	
High Temperature Operation	Ts = 70°C	240hrs	Note 2,	Note 4	
Low Temperature Operation	Ta = -20°C	240hrs	Note 1,	Note 4	
Operate at High Temperature and Humidity	+60℃, 90%RH	240hrs	Note 4		
Thermal Shock	_	°C/30 min for a total 100 old temperature and end ure.	Note 4		
Vibration Test	Frequency range:1 Stroke:1.5mm Sweep:10Hz~55Hz 2 hours for each di (6 hours for total)	z~10Hz			
Mechanical Shock	100G 6ms,±X, ±Y, direction	±Z 3 times for each			
Package Vibration Test	Random Vibration 0.015G*G/Hz from from 100-200HZ 2 hours for each di (6 hours for total)	5-100HZ, -6dB/Octave			
Package Drop Test	Height:60 cm 1 corner, 3 edges,	6 surfaces			
Electro Static Discharge	± 2KV, Human Bo	ody Mode, 100pF/1500Ω			

- Note 1: Ta is the ambient temperature of samples.
- Note 2: Ts is the temperature of panel's surface.
- Note 3: In the standard condition, there shall be no practical problem that may affect the display function. After the reliability test, the product only guarantees operation, but don't guarantee all of the cosmetic specification.
- Note 4: Before cosmetic and function test, the product must have enough recovery time, at least 2 hours at room temperature.

#### 6. General Precautions

#### 6.1. Safety

Liquid crystal is poisonous. Do not put it in your mouth. If liquid crystal touches your skin or clothes, wash it off immediately by using soap and water.

#### 6.2. Handling

- 1. The LCD panel is plate glass. Do not subject the panel to mechanical shock or to excessive force on its surface.
- 2. The polarizer attached to the display is easily damaged. Please handle it carefully to avoid scratch or other damages.
- 3. To avoid contamination on the display surface, do not touch the module surface with bare hands.
  - 4. Keep a space so that the LCD panels do not touch other components.
- 5. Put cover board such as acrylic board on the surface of LCD panel to protect panel from damages.
- 6. Transparent electrodes may be disconnected if you use the LCD panel under environmental conditions where the condensation of dew occurs.
  - 7. Do not leave module in direct sunlight to avoid malfunction of the ICs.

#### 6.3. Static Electricity

- 1. Be sure to ground module before turning on power or operating module.
- 2. Do not apply voltage which exceeds the absolute maximum rating value.


#### 6.4. Storage

- 1. Store the module in a dark room where must keep at 25±10° and 65%RH or less.
- 2. Do not store the module in surroundings containing organic solvent or corrosive gas.
  - 3. Store the module in an anti-electrostatic container or bag.

#### 6.5. Cleaning

- 1. Do not wipe the polarizer with dry cloth. It might cause scratch.
- 2. Only use a soft sloth with IPA to wipe the polarizer, other chemicals might permanent damage to the polarizer.

## 7. Mechanical Drawing

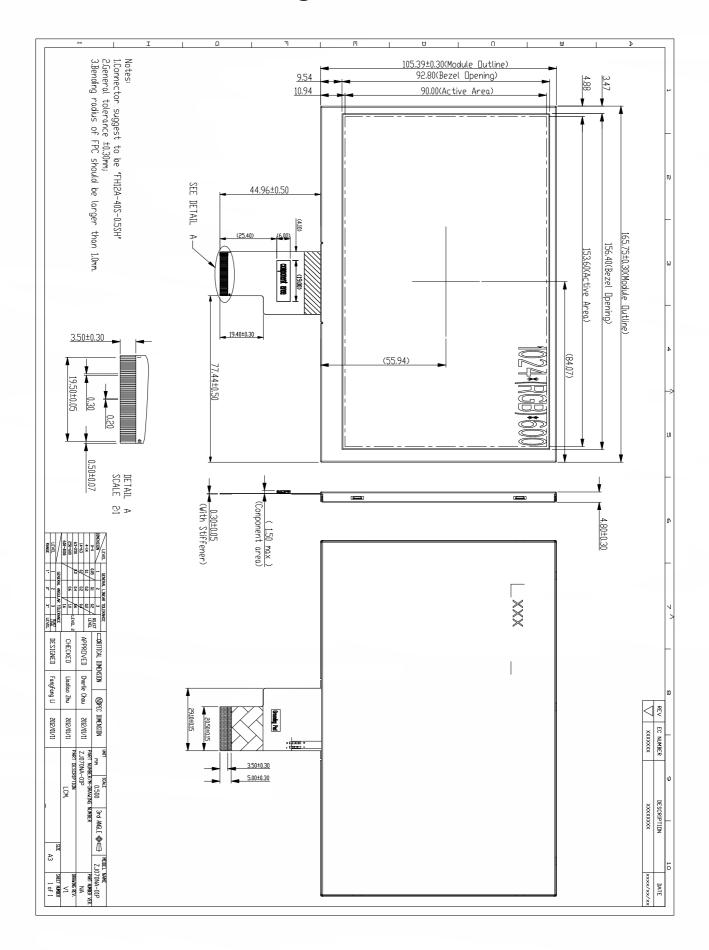

Date:2012/01/11 Page:20/21

## 8. Package Drawing

## 8.1. Packaging Material Table

No.	Item	Model (Material)	Dimensions(mm)	Unit Weight (kg)	Quantity	Remark
1	LCM Module	YH070NA-01P	165.75 × 105.39 × 4.8	TBD	TBD	
2	Partition	BC Corrugated paper	TBD	TBD	1set	_
3	Corrugated Paper	B Corrugated paper	TBD	TBD	4pcs	
4	Corrugated Bar	B Corrugated paper	TBD	TBD	4pcs	
5	Dust-Proof Bag	PE	700 × 530	0.048	1pcs	
6	A/S Bag	PE	180 × 133 × 0.2	0.002	50pcs	
7	Carton	Corrugated paper	530 × 355 × 255	1.100	1 pcs	
8	Total weight	TBD				

## 8.2. Packaging Quantity

Total LCM quantity in Carton: no. of Partition TBD Rows × quantity per Row TBD = TBD

Page:21/21

Date :2012/01/11

TBD